

The C-RAIL-CLIP product is an additional component of the individual messenger based C-RAIL® aerial access core cabling system.


It secures the cable drop point, by protecting it from any shifting caused by heavy swinging of the messenger and / or cable under heavy wind load.

C-RAIL-CLIP product is made from polyamide (PA6) dielectric material, absolutely in line with the *real all-dielectric concept* of C-RAIL® system.

The messenger-specific design of the product ensures single hand, easy and tool-less installation which is vitally important for activities that can only be executed at the top of poles.



PRODUCT DETAILS

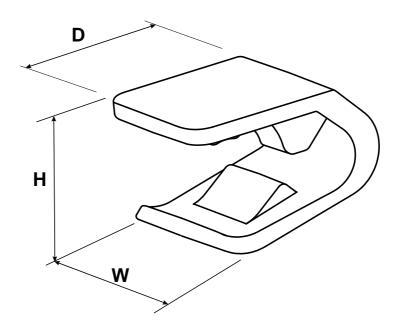

|--|

Net weight	15 g / pc
Material	PA6

Dimensions

D: 27,0 mm
W: 20,0 mm
H: 18,0 mm

Packaging Information

Box Sizes (/ 50 pcs)	12 cm x 16 cm x 10 cm

Ordering Description

C-RAIL-CLIP product can be ordered in 50 pcs packs, packaged in cardboard boxes.

MPQ (Package Quantity) 50 pc	S
MOQ (Minimum Ordering Quantity) 100 p	cs (2 boxes)

Thermal Load*

Storage	-40°C to +60°C
Installation	-5°C to +45°C
In operation	-30°C to +60°C

^{*} Please consider the standards of the used cable!

